


Sight glass ring with wiper

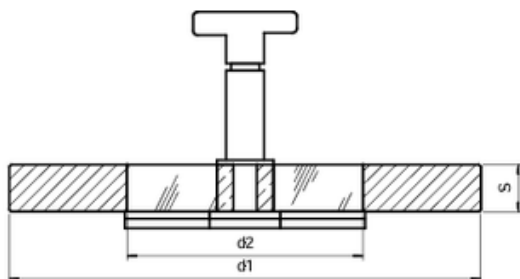


For

- Sight Glass according to DIN 28120 and derivatives
- Sight Glass according to DIN 28121

Advantages:

- **Absolute safety**
- Can be combined with lighting
- Easy assembly
- High durability

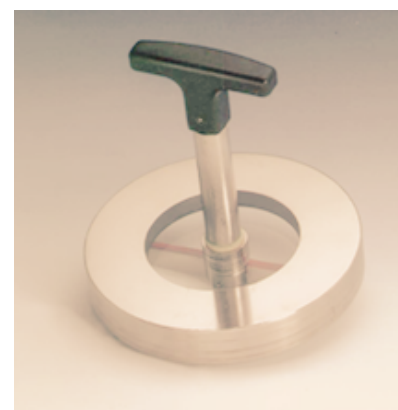

Construction Standard:

- According to DIN/EN/ISO 9001, 97/23/EG 02/98, Module H/H1
- According to AD Merkblatt W0/TRD 100 and DIN 7079
- Material in accordance with DIN/EN standards
- Borosilicate glass according to DIN 7080
- DIN 7079

Operating Conditions:

- Pressure: PN10 to PN16
- Service Temperature: 150°C
- Ring Material: 1.4462, 2.6402, 2.4605, 2.4610, etc.
- Stainless steel insert for wiper: 1.3912 (Alloy 36)

Material Certificate:

- According to EN 10204 - 3.1B

Wiper:

- Material: Stainless steel 1.4571 (316Ti), Hastelloy C22, C276
- Blade: Silicone, PTFE
- O-ring: Viton, Chemraz, Viton/FEP

Ring Material	Service Temperature
1.0570 (acier)	-10°C à +150°C
1.4462 (inox)	-30°C à +150°C
2.4602 (hastelloy)	-60°C à +150°C
2.4610	-60°C à +150°C

D1	D2	Minimal pressure	Maximum Pressure
		10 BARS	16 BARS
		S	S
80	45	12	12
100	55	15	15
125	65	15	20
150	70	20	25
166	80	15	-
175	80	20	25
200	100	25	30
250	120	30	30

<https://www.gallet-fr.com>