
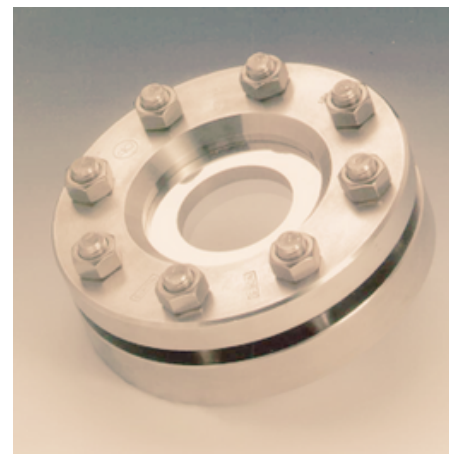


Sight Glass Ring - Technical Data Sheet Series 73

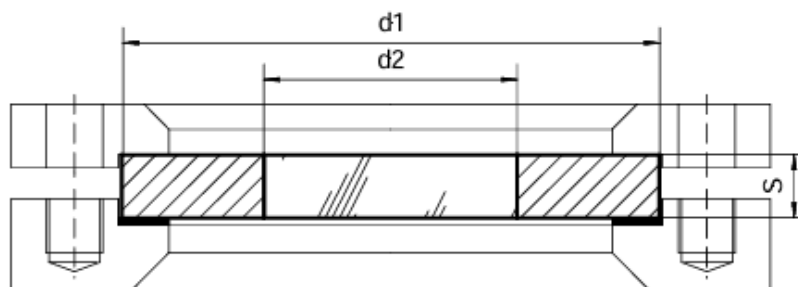

For

Sight Glass in accordance with DIN 28120 and its derivatives
Sight Glass in accordance with DIN 28121

Advantages:

- Absolute security
- Compact assembly
- Simple assembly
- extended lifespan

Approval:

- TÜV
- DIN 7079
- EX

Construction standard:

- According to DIN/EN/ISO 9001 97/23/EG 02/98, Module H/H1
- According to AD Merkblatt W0/TRD 100 and DIN 7079
- Material in accordance with DIN/EN standards
- Borosilicate glass in accordance with DIN 7080
- DIN 7079

Operating Conditions:

- Pressure: PN10 to PN64; other pressures available upon request.
- Temperature: refer to the table

Material certificate:

- in accordance with EN 10204 - 3.1B

Ring composition	Serving temperature
1.0570 (steel)	-30°C to +280°C
1.4462 (stainless steel)	-60°C to +300°C
2.4602 (hastelloy)	-60°C to +300°C

D1	D2	10 BARS	16 BARS	25 BARS	40 BARS	64 BARS
		S				
45	25	10	10	10	10	15
60	35	10	10	12	15	18
63	35	10	10	12	15	20
80	45	10	12	15	20	22
100	55	12	15	20	25	28
125	65	15	20	25	25	30
150	70	20	25	30	30	32
175	80	20	25	30	30	35
200	100	25	30	30	35	40
250	120	30	30	35	40	-

<https://www.gallet-fr.com>