


Metaclamp Aseptic Window Ring with Wiper Data Sheet 80.SW Series

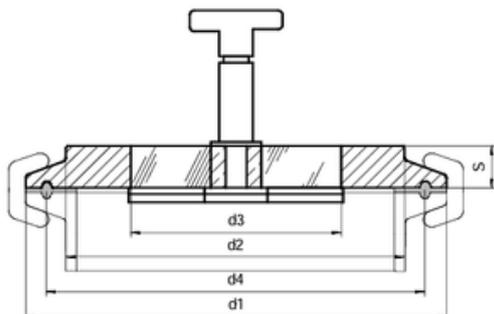

For :

Clamp fitting according to DIN 32 676 / ISO 2852

Advantages:

- Aseptic assembly
- Absolute safety
- High durability
- Compact design, easy cleaning

Construction Standards:

- Compliant with DIN/EN/ISO 9001, 97/23/EG 02/98, Module H/H1 (DIN/EN/ISO 9001)
- According to AD Merkblatt W0/TRD 100 and DIN 7079
- Material compliant with DIN/EN standards
- Borosilicate glass according to DIN 7080

Material Certificate:

- In accordance with EN 10204 - 3.1B

Materials:

- Ring: 1.4462, 2.4602, etc.
- Wiper insert: 1.3912 (Alloy 36)

Wiper :

- Blade: PTFE or Silicone
- Body: Stainless Steel A4

Operating Conditions:

- Pressure: -1 to 16 bar
- Temperature: Max. 150°C

DN	Thumb	d1	d2	d3	d4	S	Maximum pressure
65	3"	91	76	40	83.5	10	10
80	3½"	106	90	50	97	10	10
100	4"	119	102	55	110	12	10
/	6"	167	152	75	156.5	16	6
150		183	160	75	174.3	16	6
/	8"	217.5	198	100	207.4	16	6
200		233.5	210	100	225.1	16	6
/	10"	268	245	120	257.8	18	6
250		287.5	266	120	278.4	18	6
/	12"	319.3	300	140	309.1	20	6
300		338.3	316	140	328.4	20	6

<https://www.gallet-fr.com>