


## Sight glass Ring for SMS Connection Technical Data Sheet Series 81.SMS

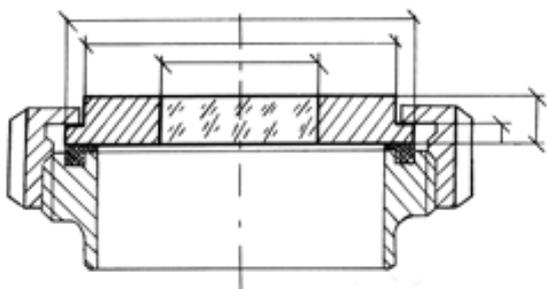

### For

- SMS Fitting

### Advantages:

- Absolute safety
- High durability
- Minimal space requirement

### Construction Standard:

- According to DIN/EN/ISO 9001, 97/23/EG 02/98, Module H/H1 (DIN/EN/ISO 9001)
- According to AD Merkblatt W0/TRD 100 and DIN 7079
- Material in accordance with DIN/EN standards
- Borosilicate glass in accordance with DIN 7080

### Terms of Service:

Temperature: Refer to the table

### Material Certificate:

according to EN 10204 - 3.1B

Ring composition	Serving temperature
1.4462	-30°C to +280°C
2.4602	-60°C to +300°C
2.4605	-60°C to +300°C
2.4610	-60°C to +300°C

DN	D1	D2	d3	h	g	pression maximale
25	35.5	20	32	10	5	6
38	55	25	47.9	10	5	6
51	65	35	60.4	10	5	6
76	92	50	85	10	5	6
104	118	60	112	10	5	6

<https://www.gallet-fr.com>