


Metaclamp Sight glass Ring for NA-Connect™ Mounting 80.NA Series Data Sheet

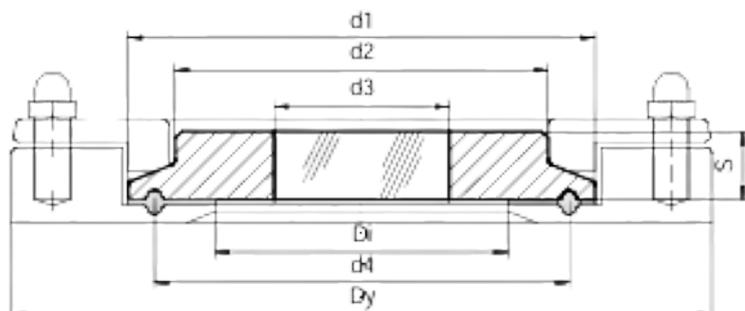

For :

- NA-Connect™
- Fitting DIN 32 676 / ISO 2852

Advantages:

- Aseptic installation
- Absolute safety
- Compact assembly, easy cleaning
- High durability

Approval:

- Compliant with A3 Standard for the food industry

Construction Standard:

- Compliant with DIN/EN/ISO 9001, 97/23/EG 02/98, Module H/H1 (DIN/EN/ISO 9001)
- Compliant with AD Merkblatt W0/TRD 100 and DIN 7079
- Material compliant with DIN/EN standards
- Borosilicate glass compliant with DIN 7080

Operating Conditions:

- Pressure and temperature: see table

Material Certificate:

- Compliant with EN 10204-3.1B

Stainless steel as a ring material	Serving temperature
1.4462	-30°C to +280°C
2.4602	-60°C to +300°C
2.4610	-60°C to +300°C

dimension NA-Connect	PN	d1	d2	d3	d4	S	Those	From	
FROM	Tube Outer Diameter								
	NAC-OD-¾"	16	25	18	10	20.2	7	55	15
NAC-DIN-20		16	34	24	12	27.5	7	70	20
NAC-DIN-40	(NAC-OD-1½")	16	50.5	38	25	43.5	7	85	35.5
NAC-DIN-50	(NAC-OD-2")	16	64	51	30	56.5	7	100	48.5
	(NAC-OD-2½")	10	77.5	63.5	35	70.5	10	112	60.2
NAC-DIN-65	(NAC-OD-3")	10	91	76	40	83.5	10	131	72
NAC-DIN-80		10	106	88.9	50	97	10	146	84.9
NAC-DIN-100	(NAC-OD-4")	10	119	101.6	55	110	12	170	97.6

<https://www.gallet-fr.com>