
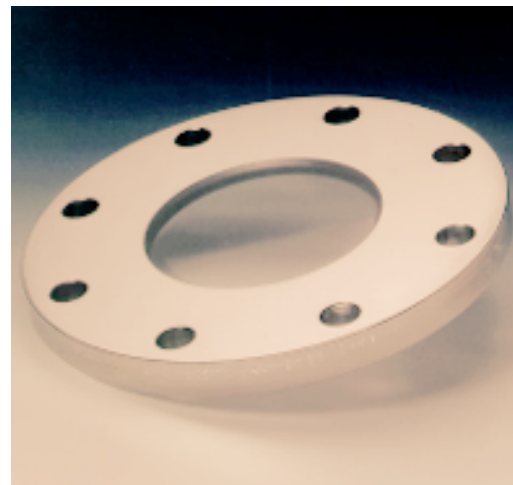


Sight glass flange – in accordance with DIN 2501

Technical Data Sheet Series 11

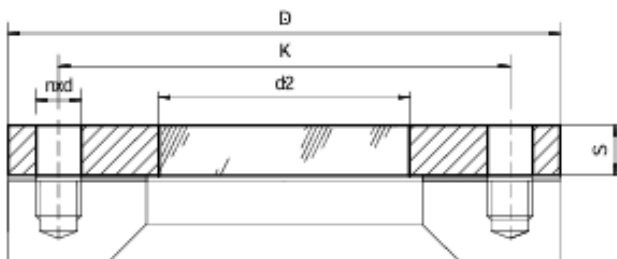

For :

- ISO Flat Flange with Flat Gasket Seating

Advantages:

- Absolute safety
- Easy assembly
- Maximum sight diameter
- Minimal footprint

Construction Standard:

- Compliant with DIN/EN/ISO 9001, 97/23/EG 02/98, Module H/H1 (DIN/EN/ISO 9001)
- Compliant with AD Merkblatt W0/TRD 100 and DIN 7079
- Material compliant with DIN/EN standards
- Borosilicate glass compliant with DIN 7080

Approval:

- TÜV, for flanges PN6 to PN40

Material Certificate:

- Compliant with EN 10204-3.1B

Ring composition	Serving temperature
1.4462	-30°C to +280°C
1.0570	-10°C to +300°C
2.4602	-60°C to +300°C
2.4610	-60°C to +300°C
2.4605	-60°C to +300°C

Bride				Glass	Still			Joint
DN	D	K	S	d2	n		d	
40	130	100	14	40	4	M12	14	130x70x2
50	140	110	14	50	4	M12	14	140x85x2
65	160	130	14	70	4	M12	14	160x100x2
80	190	150	16	80	4	M16	18	190x110x2
100	210	170	16	100	4	M16	18	210x130x2
125	240	200	18	125	8	M16	18	240x160x2
150	265	225	20	140	8	M16	18	265x185x2
200	320	280	20	160	8	M16	18	320x240x2

<https://www.gallet-fr.com>